

HADI-Q

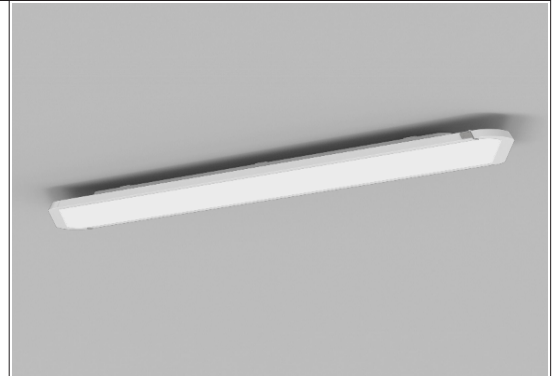

03

CRYSTAL WHITE

Crystal white
(01-32)

03

CRYSTAL WHITE

Crystal white
(01-32)


ARTICLE NUMBER 310-3640

112 mA

IP20



incl.



50/60Hz

220-240V



MOUNTING

Mounting location: Ceiling
Type: Surface

ELECTRICAL

Voltage: 220-240V
Control gear needed: Yes
Control gear included: Yes
Dimming: Not dimmable

DIMENSION

Length/Width: 1403mm / 240mm
Height: 48 mm

WEIGHT

Net: 6.326 kg

LIGHT

Adjustability: fixed
Light calculation: Direct
FWHM / Beam Angle: 86°

LAMP DESCRIPTION

Lamp type: LED
Total power: 37 W
Power loss ballast: 3.4W
Luminous flux of the light source: 4976 lm
Luminous flux of the luminaire: 3911 lm
Colour rendering index (CRI): 90
MacAdam: 3
LED colour direct: 3000K

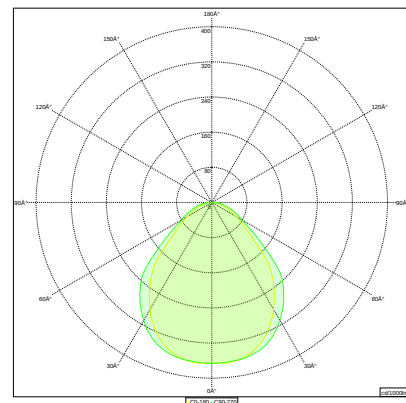
ORDER NUMBER

310-3640 03 03 30

TECHNICAL DESCRIPTION

Surface-mounted light (Aluminium); futuristic design; perfect integration in the room; passive cooling using Alu-profile; no visible screws; "Edge Light" technology without shadow formation within the luminaire; "SOFT EDGE" Design; 2 powder-coated color options; RAL colors on request; 220-240V Volt, 50/60Hz Hz; not dimmable; 3-pole terminal block; Direct light colors: optionally 3000K or 4000K.; CRI > 90; MacAdam: 3; 80,000 hours lifespan; Flicker-free operation with suitable electronic ballast; no formation of multiple shadows; LGP-Body ("LIGHT GUIDING PRISM"); uniform illumination of a double workstation; directly emitting; Light source can be replaced by professional staff.; complies with EN 60598-1; IP protection type IP20; Electrical Protection Class I; Height: 48.00 mm; Length: 1403.00 mm; Width: 240.00 mm

Polar Curve



Measurement based on the color white



Date: 5/20/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at